



Housing

Aluminum body with electrostatic powder coating.

Optics

Opal white diffusing lens with lambertian light distribution and high transmissivity.

Led

High-efficacy double chip LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.

Driver

Constant current output LED driver with high efficiency and $Pf \geq 0.95$



Options

Dimming via DALI

Color

01	02	03
Ral 9016	Ral 9005	Ral 7805

Type	Order Code	CCT (K)	lm	CRI	W	V/Hz	Weight (kg)
S 0450 DYN	SDYN.450.35.30	3000	3000	Ra>80	35	220-240 / 50-60	4,1
	SDYN.450.35.40	4000	3000				

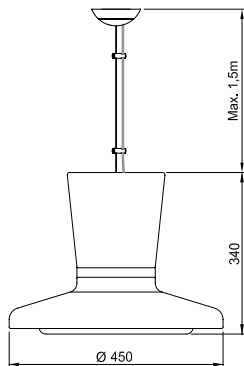

*suspension wire max. 1.5 m