

DecoPendant Luminaires

Puzzle

PZL

Circular-designed decorative luminaire



PRODUCT CODE EXPANSION

Güç / Power / Watt
Işık rengi / Light Color

PZL-W-C

PZL LUMINAIRE OPTIONS

Mono Color

W PZL: 24V DC - 250W - 8.400Lm
PZL: 24V DC - 500W - 16.800Lm



APPLICATION AREAS

This luminaire, designed in the shape of a puzzle piece, is utilised in large space venues such as shopping malls, restaurants and hotels.

ELECTROMECHANICAL SPECIFICATIONS

PZL-W-C

- Anodized aluminium housing
- Plexiglass diffused cover
- Can also be manufactured outside of the standard dimensions.

PCB & LED SPECIFICATIONS

PZL-W-C

The LEDLine options, used within the profile, are selected according to the cooling capacity of the product.
(P.S Luminaire Power Options)




LIGHT COLOUR OPTIONS

PZL-W-C

- CW: Cold White - 4.700K-9.500K
- C NW: Natural White - 3.700K-4.700K
- WW: Warm White - 2.700K-3.700K

MOUNTING

The luminaires are suspendedly mounted on the ceiling. Procured with 2,5 meter cable as standard.

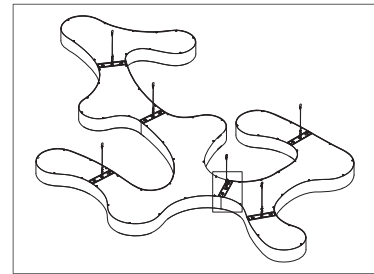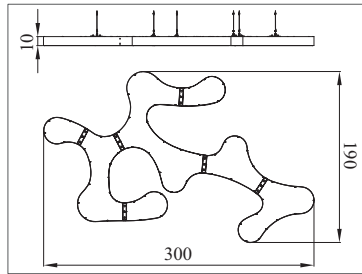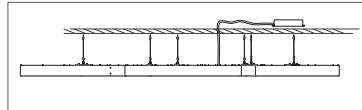

Protection Class: IP44

Lifetime: 50.000 hours

The specified power ratings are the total amount of energy consumed by the luminaire. The losses in power supplies have not been taken into consideration.

SLS

Swiss Lighting Solution

DecoPendant Luminaires



DecoPendant PZL



CONTROL SYSTEM OPTIONS

The power supplies for these luminaires are external. In cases where control system is utilised, the power supplies and control systems are externally used. The control systems should be selected from the accessories chart.

EXTERNAL ACCESSORIES

EXTERNAL CONTROLLER OPTIONS

DIMMER OPTIONS

- UKR - RF Remote Control
- PWM - PWM Control
- DMX1 - DMX Control, 1 adress
- DALI - DALI Control
- 0-10V DC - Analog 0-10V DC Control
- TRC - TRIAC Control

COLOR CONTROL OPTIONS

- UKR - RF Remote Control
- PWM - PWM Control
- DMX - DMX Control, 1 adress
- DMX - DMX Control, 3-4 adress



SLS

Swiss Lighting Solution